



설치도 1

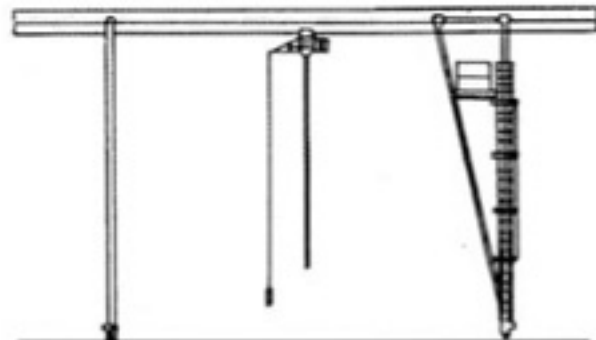

설치도 2

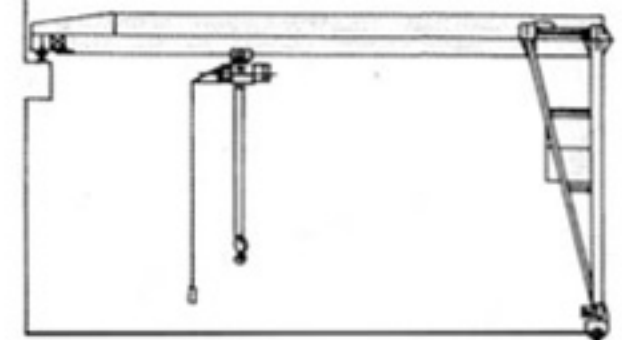

설치도 3

Specification(Double Girder With Double Rail Hoist)

MODEL	CAPA-CITY(ton)	MAX SPAN(m)	LIFT (m)	SPEED/MOTOR(m/min)/(kw)			APPROX.DIMENSIONS(mm)				TRAVELING WHEEL(mmφ)	RUN WAY RAIL		
				HOISTING	TRAVERSING	TRAVELING	H	R	A	B				
SGC	3	15	9 or 12	4.5/2.5 or 9/5	16/0.5 or 24/0.75	20/1.5/ 1/16 or 30/1.5/ 1/11.8	420	950	4000 ~ 5000	4500 ~ 5500	250	22 30		
		17.5												
		20												
SGC	5	10		4.2/4.2 or 5.6/5.5			10/0.5 or 15/0.75	750	1150	4000 ~ 5000			4600 ~ 5600	315
		12.5												
		15												
SGC	10	10		3/8.5 or 4.5/13	10/1 or 15/1.5	995	1200	4000 ~ 6000	4950 ~ 6950	500 630				
		12.5												
		15												
SGC	15	10		2.8/11.5 or 4.2/17	10/1×2 or 15/1.5×2	1175	1300	4000 ~ 6000	5100 ~ 7100	630 710 800				
		12.5												
		15												
SGC	20	10	1.8/11.5 or 2.8/17	15/1.5×2	1480	1800	4000 ~ 6000	5200 ~ 7200	630 710 800					
		12.5												
		15												
SGC	30	10												
		12.5												
		15												
SGC	30	17.5												
		20												
		20												